



4TH GEN 4RUNNER Lexus GX470 Ditch Light Brackets

installation instructions



Hardware:

- (4) – 8mm X 1.25 X 30mm
- (4) – 5/16" SAE washers

• Remove cowling side caps

To remove the cowling side caps gently pry them up and away from the cowling. The side caps will no longer be used.

• Remove fender bolts

Remove the fender bolts and pull fender away from body to gain access to the hood hinge.

• Access hood hinge

With the fender pulled back remove the factory bolts from the lower hood hinge located behind the fender.



**** CAUTION** Complete installation before starting second light bracket install.

• Install light bracket

Position the brackets on top of the hinge over the holes shown. Using the provided hardware replace the factory hinge bolt.

Push the fender back in and re-install the upper fender bolts.

Carefully close the hood and check clearance.

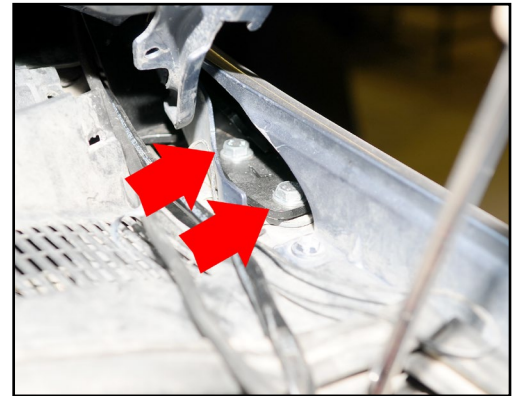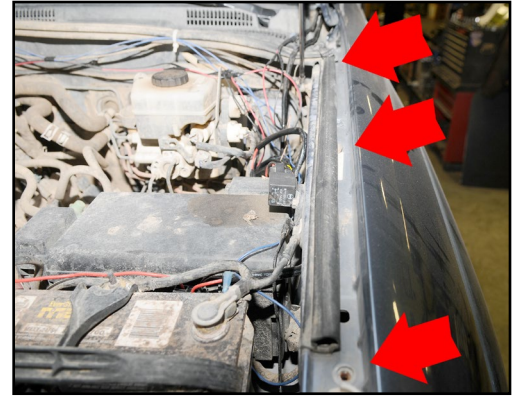

For questions or further help:

Call: 866-522-0697

Email: info@cbioffroadfab.com