

CBI 2" HITCH

SHACKLE ADAPTOR



Applications

installation instructions

These installation instructions apply to the following CBI Off Road products

– **CBI 2" HITCH SHACKLE ADAPTOR**

IMPORTANT!

THANK YOU for purchasing this CBI product. Please read through this entire document before proceeding with installation. If you are not confident in your mechanical skills, please seek the help of a professional to perform the installation. Check your packages immediately upon arrival to ensure that everything listed is included, and to check for damage during shipping. ***If anything is missing or damaged, or if you need technical assistance with any aspect of this installation, call CBI at (208) 528-0664 as soon as possible.***

IMPORTANT!


If your CBI product comes as unpainted, bare steel or aluminum. You will want to either powder coat or paint prior to final installation, however it is very important to PRE-INSTALL the unpainted product first, following these instructions, BEFORE painting or powder coating any of the components! This will ensure that all parts are correct and any incidental trimming or drilling will have been done prior to coating. Also, it will give you a practice run to familiarize yourself with the process, to lessen the likelihood of damaging the finish during final installation. CBI Off Road is NOT RESPONSIBLE for paint or powder coating costs, damage to paint or powder coating, or costs associated with inadvertently painting or powder coating components that are defective or were shipped or assembled in error. It is the customer's responsibility to pre-install and verify that all parts are correct prior to paint or powder coat

Questions?

Call: 866-522-0697

Email: info@cbioffroadfab.com


Hardware 1:1 Scale View

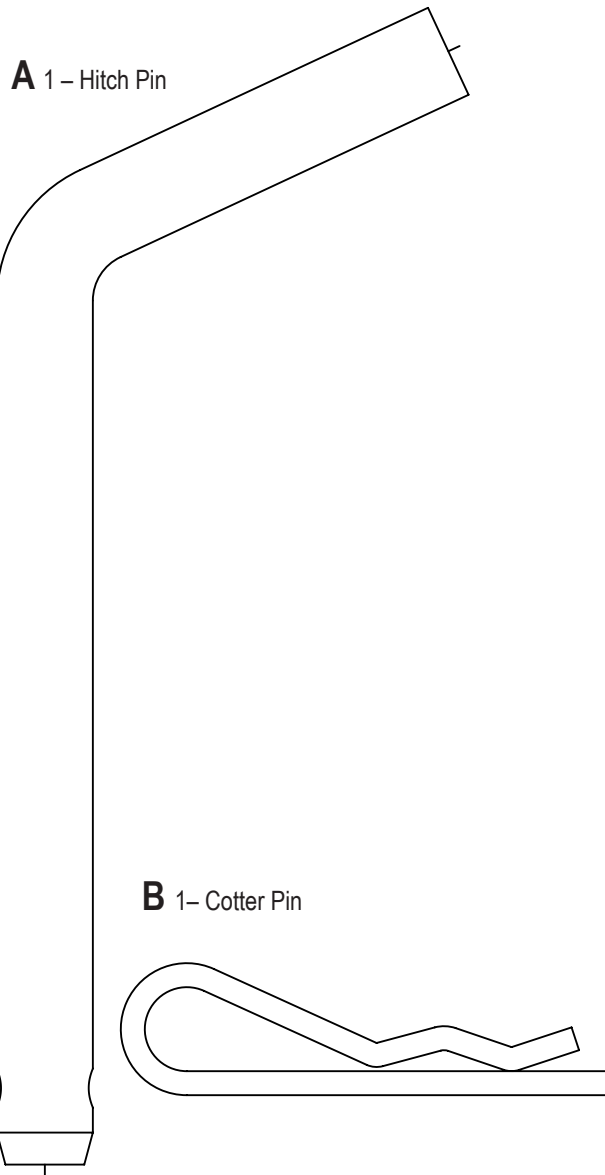

Note for Dealers and Installers:

It is your responsibility to ensure instructions are given to the end user or client.

Exploded Product/Hardware View

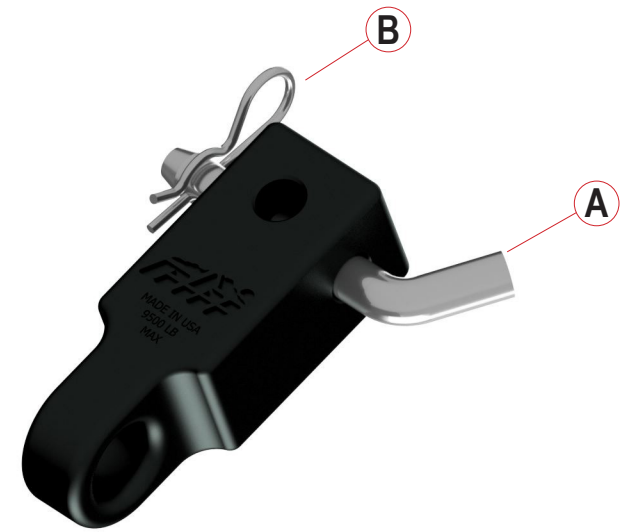

Gunmetal grey type III hard anodized
CNC machined for ultimate precision
Allows receiver to be used as a recovery tow point.
Rated to 9500 pounds
Dual orientation mounting holes allow for vertical or horizontal eyelet mounting
Fits standard 2 inch receivers
Fits standard 3/4" shackles
Large machined radius ensures soft shackle compatibility
MADE IN USA

Note:

- Always use a high quality steel alloy 5/8" hitch pin
- Always pull in line with the hitch adaptor. Do not side load.
- Never exceed factory receiver hitch pull rating



792 E Iona Rd.
Idaho Falls, ID 83274
cbioffroadfab.com
208.528.0664